



alley

ADVANTAGES

- Long lasting appearance
- Easy maintenance

APPLICATION


- Outdoor podium, shopping centre
- Bridges, walkway

FEATURES

- The body is made from corrosion resistant die-cast aluminium
- Die cast aluminium trim or stainless steel trim are also available upon request with a polyester powder coating with UV stabilized component.
- The reflector is anodized sand blasted aluminium with produces an efficient of lighting distribution.
- The sand blasted tempered glass is set inside the frame is attached to the body via 4 stainless steel screws.
- A silicon rubber-sealing gasket provides ingress protection IP65


CHARACTERISTICS

- Optical assembly : IP 65
- Electrical Insulation : Class I
- Voltage : 220V~240V
- Wattage : 13W~70W
- Lamp type : PLC, CDM-T, HQI
- Dimensions (mm) : 260(L) x 195(H)
- Approx. Net weight : 6~8 kg





dimension (mm)

1X26W PLT WIDE BEAM



1X70W CDM-T WIDE BEAM

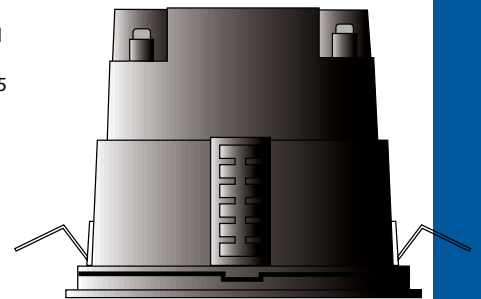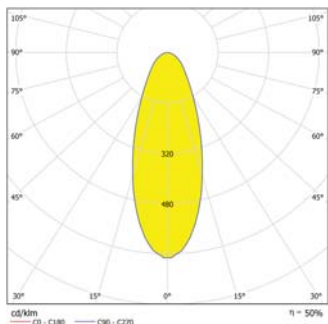

Model No.	Description	Voltage	Frequency	Lamp
GPCP0644	ALLEY 1x26W PLT C/W Gear & Bulb	220V-240V	50-60Hz	G24q3
GPCP0645	ALLEY 2x13W PLC C/W Gear & Bulb	220V-240V	50-60Hz	G24d-1
GPCP0646	ALLEY 2x18W PLC C/W Gear & Bulb	220V-240V	50-60Hz	G24d-2
GPCP0647	ALLEY 2x26W PLT C/W Gear & Bulb	220V-240V	50-60Hz	G24q-3
GPCP0648	ALLEY 1x35W CDM-T C/W Gear & Bulb	220V-240V	50-60Hz	G12
GPCP0649	ALLEY 1x70W CDM-T C/W Gear & Bulb	220V-240V	50-60Hz	G12
GPCP0650	ALLEY 1x70W HQI C/W Gear & Bulb	220V-240V	50-60Hz	Rx7s

ordering information