





arro V

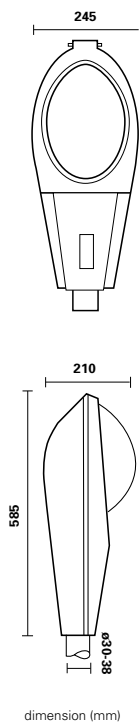

Arro V 150W HPSV

ADVANTAGES

- Die-cast aluminium
- Borosilicate glass bowl
- High performance, easy maintenance

APPLICATION


- Streets, residential area, parking areas
- Industrial areas, security, perimeter lighting
- Suggested mounting heights : 4~12 meters

FEATURES

- Enclosed luminaires for pole and mounting.
- Die-cast aluminium housing: top and bottom.
- Finished with polyester powder paint. Standard colour: grey.
- Ballast components mounted on a removable gear tray.
- Silicone sealed optics.
- Anodised finish on hydroformed aluminium reflector.
- Borosilicate glass prismatic refractor.
- Standard E27
- Easy access to ballast compartment and lamp by opening the top housing. Lamp replacement without tools.
- Side mounting adjustable for 30mm~38mm diameter.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Aerodynamic Resistance (CXS) : 0.048m²
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70W~125W
- Lamp Type : HPS & M/H
- Dimensions (mm) : 585(L) x 245(W) x 210(H)
- Approx. Net weight : 7~11 kg

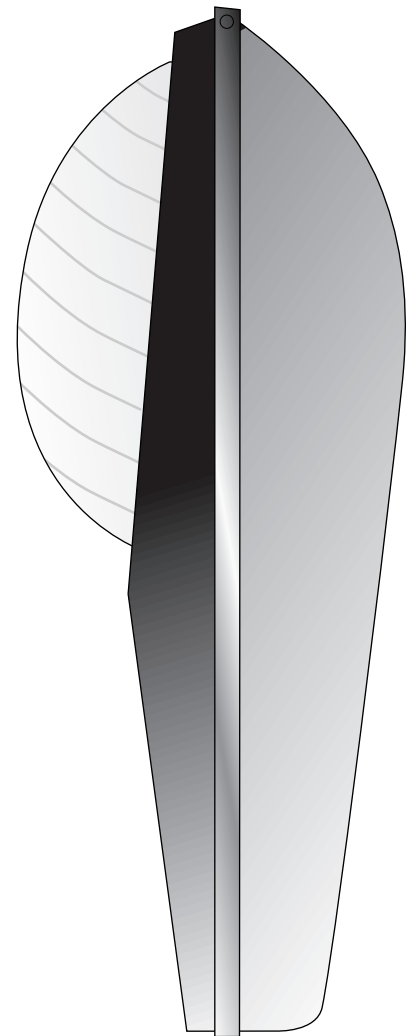

Model No.	Description	Voltage	Frequency	Lamp
ACPV0001	ARRO V 70W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E27
ACPV0004	ARRO V 70W MH C/W Control Gear & Tube	220-240V	50-60Hz	E27
ACPV0006	ARRO V 80W MV C/W Control Gear & Tube	220-240V	50-60Hz	E27
ACPV0007	ARRO V 125W MV C/W Control Gear & Tube	220-240V	50-60Hz	E27

ordering information