

Arro 1 250W HPSV

arro 1

ADVANTAGES

- Architectural stylish appearance
- Fully aluminium and glass
- High performance, easy maintenance
- Choice of colours.

APPLICATION


- Streets, highway, parking areas, security
- Perimeter lighting, architecture & landscape
- Suggested mounting heights : 6~12 meters.

FEATURES

- Enclosed luminaries for pole mounting.
- Die-cast aluminium housing: top and bottom.
- Finished with polyester powder paint. Standard colour – grey.
- Ballast components mounted on a removable gear tray.
- Silicone sealed optics – Tightseal 66.
- Anodised finished on hydroformed aluminium faceted reflector.
- Tempered clear curved glass. Filter optical.
- Adjustable lamp socket – standard E40 or E27 (depending on lamp).
- Easy access to ballast compartment and lamp by opening the top housing. Lamp replacement without tools.
- Side mounting adjustable for $\varnothing 42\sim 50$ mm diameter.
- Dimming system & Deep bowl (reflector) available upon request.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 44
- Aerodynamic Resistance (CXs) : 0.053m²
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70W~250W
- Lamp Type : H.P. Sodium, M/Halide or Mercury Vapour
- Dimensions (mm) : 680(L) x 320(W) x 200(H)
- Approx. Net weight : 9~12 kg

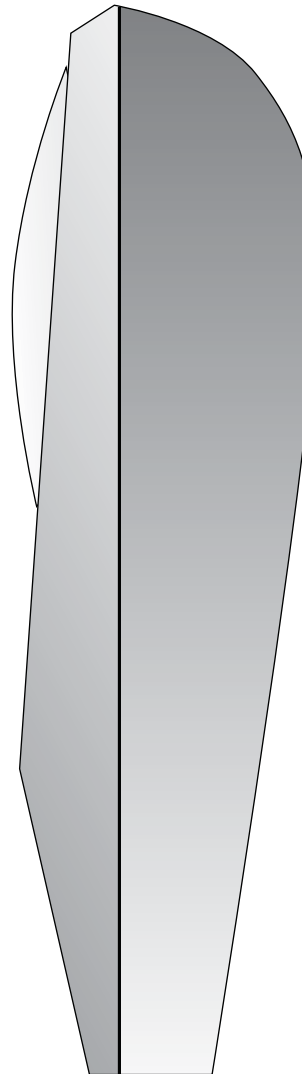

Model No.	Description	Voltage	Frequency	Lamp
ACP10001	ARRO 1 70W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E27
ACP10002	ARRO 1 100W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E40
ACP10003	ARRO 1 150W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E40
ACP10004	ARRO 1 250W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E40
ACP10005	ARRO 1 70W MH C/W Control Gear & Tube	220-240V	50-60Hz	E27
ACP10006	ARRO 1 150W MH C/W Control Gear & Tube	220-240V	50-60Hz	E27
ACP10007	ARRO 1 250W MH C/W Control Gear & Tube	220-240V	50-60Hz	E40