

arro VE

ADVANTAGES

- Arhitectural stylish appearance
- Fully die-cast aluminum and glass
- High performance, easy maintenance
- Choice of colors

APPLICATION




- Streets, parking areas, security
- Perimeter lighting, architecture and landscape
- Suggested mounting heights : 4~8 meters

FEATURES

- Enclosed luminaires for pole and mounting.
- Die-cast aluminium housing: top and bottom.
- Finished with polyester powder paint. Standard colour: grey.
- Ballast components mounted on a removable gear tray.
- Silicone sealed optics. Tightseal 66.
- Anodised finish on hydroformed aluminium reflector.
- Tempered clear curved glass.
- Easy access to ballast compartment and lamp by opening the top housing.
- Lamp replacement without tools.
- Side mounting adjustable for 42mm~50mm diameter.

CHARACTERISTICS

- Optical assembly : IP 66
- Ballast Compartment : IP 54
- Aerodynamic Resistance (CXS) : 0.030m²
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70W~150W
- Lamp Type : HPS & M/H
- Approx. Net weight : 6~8 kg

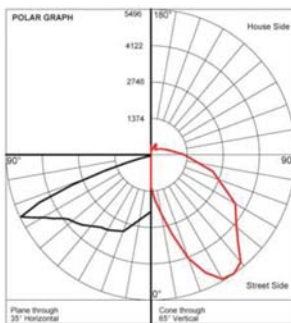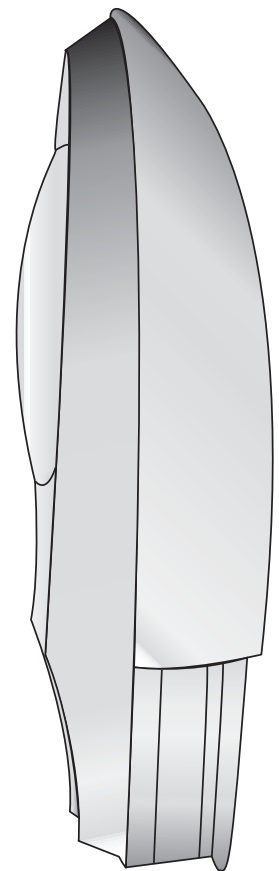

Model No.	Description	Voltage	Frequency	Lamp
ARRO VE	70W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E27
ARRO VE	150W HPS C/W Control Gear & Tube	220-240V	50-60Hz	E27
ARRO VE	70W MH C/W Control Gear & Tube	220-240V	50-60Hz	E27
ARRO VE	150W MH C/W Control Gear & Tube	220-240V	50-60Hz	E27

ordering information