



**bollard 2**

**ADVANTAGES**

- Architectural stylish appearance
- Choice of colour

**APPLICATION**


- Walkways, pedestrian path
- Square, architectural & landscape

**FEATURES**


- Die cast and extruded aluminium housing with high resistant to oxidation.
- Finished with epoxy powder coating.
- Standard colour – Black. \*Option colour – White and Silver.
- Ballast compartment mounted on a removable gear tray.
- Internal louvre reflector for anti glare.
- Vandal resistant and V2 self extinguishing polycarbonate.
- UV stabilized clear diffuser.
- Lamp holder in ceramic with silver contacts. Standard E27, G24d2 & G24d3

**CHARACTERISTICS**


- Optical assembly : IP 54
- Ballast Compartment : IP 54
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 13W~18W
- Lamp Type : 1 x PLC or TC-TSE  
HPS, M/H or MBF
- Dimensions (mm) :  $\phi 175 \times 955(H)$   
\*height: approx 600mm on request
- Approx. Net weight : 6~8 kg




$\phi 175$



dimension (mm)



PLC 1x26W

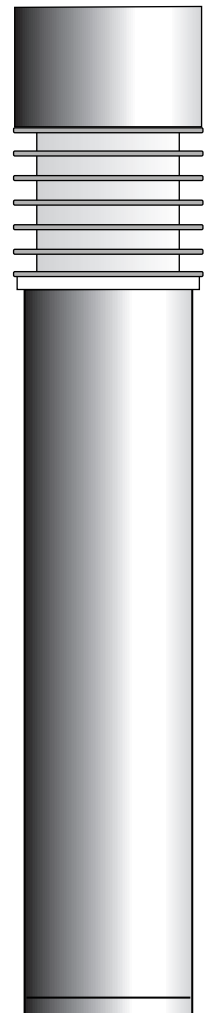

Model No.	Description	Voltage	Frequency	Lamp
GPCP0571	BOLLARD 2 70W MH C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0572	BOLLARD 2 70W HPS C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0573	BOLLARD 2 80W MBF C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0574	BOLLARD 2 125W MBF C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0575	BOLLARD 2 1x18W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24d2

ordering information