


buried 300 / 300SQ

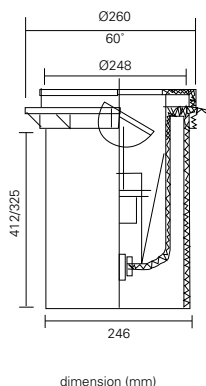

ADVANTAGES

- Architectural stylish appearance, Stainless steel
- Vandal resistant, anti corrosion, easy maintenance

APPLICATION

- Architectural & landscape
- Walkway, park, seaside area
- Pedestrian path, shopping square, street path

FEATURES

- Enclosed luminaires for buried ground.
- Stainless steel housing and frame with highly corrosion proof.
- In AISI 316 stainless steel finish.
- Acid treated, thermal shock proof, tempered protection glass and pressure resistant (max 2000 kg).
- Lamp holder – in ceramic with silver plated contact.
- Ballast compartment mounted on a removable gear tray.
- Anodised finished on polished aluminium reflector.
- In built with recessed mounting box.
- Buried 300 series – adjustable reflector (for G12 only).

CHARACTERISTICS

- Optical assembly : IP 66
- Ballast Compartment : IP 66
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70W~150W
- Lamp Type : M/H (Rx7s)
- Dimensions (mm) : ø260 x 325(H) - 70W
: ø260 x 412(H) - 150W
- Approx. Net weight : 6~8 kg



Model No.	Description	Voltage	Frequency	Lamp
GPCP0094	BURIED 300 70W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	Rx7s
GPCP0095	BURIED 300 150W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	Rx7s
GPCP0096	BURIED 300 70W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	G12
GPCP0097	BURIED 300 150W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	G12
GPCP0851	BURIED 300 35W CDM-R C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0852	BURIED 300 70W CDM-R C/W Control Gear & Lamp	220V-240V	50-60Hz	E27

ordering information