



duplo

Outdoor luminaire for semi-recessed or surface mounting with upward and downward light distribution (1/3 and 2/3) with prismatic control. By turning the position of the luminaire it is possible to obtain predominantly indirect or direct illumination. Suitable for low mounting heights also.

APPLICATION




- Wall washer for direct/indirect lighting.
- Suitable environment such as churches, lounges, gymnasiums and halls.

FEATURES



- High impact resistant injection molded composite technopolymer body.
- Self-extinguishing V0-UL94. Glow-wire test, iec695-2-1, 850°C.
- UV stabilized polycarbonate prismatic diffuser.
- Silicone rubber gaskets and super pure aluminium reflector.
- Internal cable looping facility.
- Suitable for heavy-duty service (en 60598-1) mechanical shock resistant up to 6,5nm.
- Mounting on normally inflammable surfaces allowed.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V
- Wattage : PLC 26~42W, 70~150W MH
80W MBF, 70W SON
- Lamp Type : Gx24q4, Rx7s, E27
- Dimensions (mm) : 367(L) x 120(W) x 176(H)
- Approx. Net weight : 6.3kg



dimension (mm)

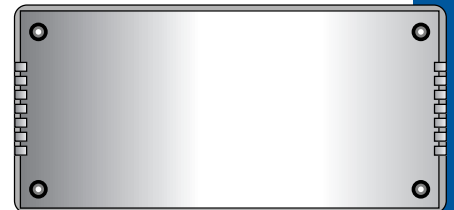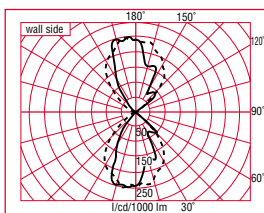

Model No.	Description	Voltage	Frequency
CTCP0009	DUPLO PLC 26W C/W Gear & Lamp	220-240V	50-60Hz
CTCP0010	DUPLO PLC 32W C/W Gear & Lamp	220-240V	50-60Hz
CTCP0011	DUPLO PLC 42W C/W Gear & Lamp	220-240V	50-60Hz
CTCP0012	DUPLO 70W MH (Rx7s) C/W Gear & Lamp	220-240V	50-60Hz
CTCP0013	DUPLO 150W MH (Rx7s) C/W Gear & Lamp	220-240V	50-60Hz
CTCP0014	DUPLO 80W MBF C/W Gear & Lamp	220-240V	50-60Hz
CTCP0015	DUPLO 70W SON C/W Gear & Lamp	220-240V	50-60Hz

ordering information