






excell flat quadra 300



Ø300
dimension (mm)



excell flat quadra 2x11W

ADVANTAGES

- Architectural stylish appearance
- High performance
- Easy maintenance

APPLICATION


- Hotel, exhibition, restaurant, home
- Shop, school, hall

FEATURES

- Enclose luminaire for indoor lighting.
- Body and ring in polycarbonate.
- Semi-transparent diffuser made of PMMA.
- Level operated opening/closing without screws.
- Colour – Black or White.

CHARACTERISTICS

- Optical assembly : IP 54
- Ballast Compartment : IP 54
- Electrical Insulation : Class II
- Voltage : 220V~240V
- Wattage : 9W~28W
- Dimensions (mm) : ø300 x 75(H)

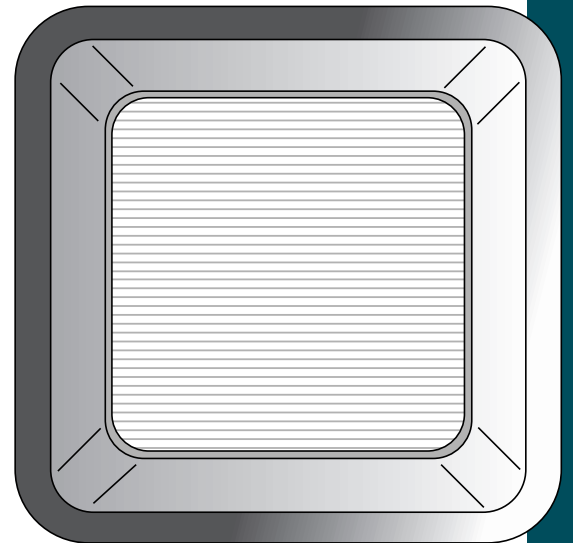

Model No.	Description	Voltage	Frequency
LMBC0026	EXCELL FLAT QUADRA 300 2x11W PL-S C/W Gear & Lamp	220-240V	50-60Hz
LMBC0027	EXCELL FLAT QUADRA 300 1x16W 2D C/W Gear & Lamp	220-240V	50-60Hz
LMBC0028	EXCELL FLAT QUADRA 300 1x28W 2D C/W Gear & Lamp	220-240V	50-60Hz
LMBC0029	EXCELL FLAT QUADRA 300 1x26W PL-C C/W Gear & Lamp	220-240V	50-60Hz

NOTE: Please specify colour and type of lamp when ordering

ordering information