



excell tonda 300

ADVANTAGES

- Architectural stylish appearance
- High performance
- Easy maintenance

APPLICATION



- Hotel, exhibition, restaurant, home
- Shop, school, hall

FEATURES


- Enclose luminaire for indoor lighting.
- Body and ring in technopolymer.
- Diffuser made of polycarbonate.
- Level operated opening/closing without screws.
- Colour – Black or White.

CHARACTERISTICS


- Optical assembly : IP 54
- Ballast Compartment : IP 54
- Electrical Insulation : Class I
- : Class II (on request)
- Voltage : 220V~240V
- Wattage : 9W~22W
- Dimensions (mm) : ø305 x 120(H)



dimension (mm)



excell tonda 2x9W

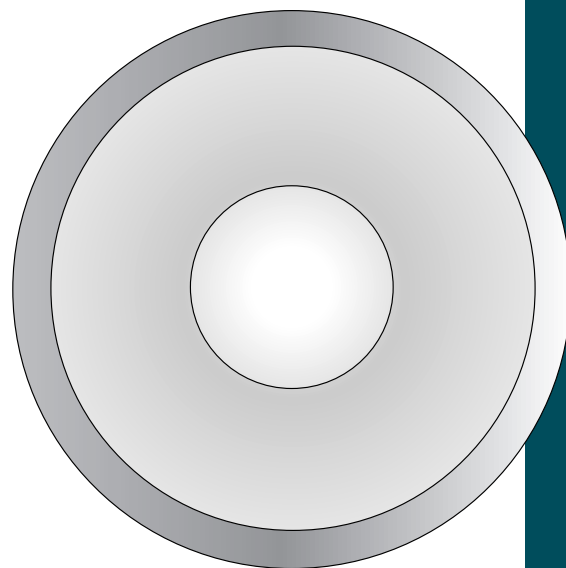

Model No.	Description	Voltage	Frequency
LMBC0023	EXCELL TONDA 300 2x9W PL-S C/W Gear & Lamp	220-240V	50-60Hz
LMBC0024	EXCELL TONDA 300 1x22W TL-E C/W Gear & Lamp	220-240V	50-60Hz
LMBC0025	EXCELL TONDA 300 1x16W 2D C/W Gear & Lamp	220-240V	50-60Hz

NOTE: Please specify colour and type of lamp when ordering

ordering information