




show-semi

ADVANTAGES

- High performance & easy maintenance
- Fully aluminium & glass

APPLICATION

- Factories, assembly plants
- Warehouse, hanger, foundries
- Multipurpose hall, commercial
- Suggested mounting height : 5m and above




FEATURES

- Die cast aluminium ballast housing and cover with cooling fins.
- Finish with epoxy polyester powder paint – Standard Black.
- Zinc coated safety chains attach with ballast housing for safe common maintenance. Stainless steels external screws.
- High reflectance anodised finished on shape 99.8% aluminium reflector.
- Double beam reflector with anti glare.
- Self extinguish polycarbonate V2 reflector with internal prism to improve light beam distribution.
- Ballast components mounted on a removable gear tray for easy maintenance.
- Thermal shock resistant tempered glass in a silicone rubber sealing gasket with securing clip in nickel coated steel.
- Ceramic lamp holder with silver plated contact – Standard E40.
- Tempered glass locked to the body by safety chain.
- Emergency switch quartz system available (on request).
- HIR system available (on request).

CHARACTERISTICS

- Optical assembly : IP 66
- Ballast Compartment : IP 66
- Electrical Insulation : Class 1
- Voltage : 230V~240V
- Wattage : 150W~400W
- Lamp type : HPS, M/H or MBF
- Dimensions (mm) : 620(L) x 720(H)
- Approx. Net weight : 6~9 kg

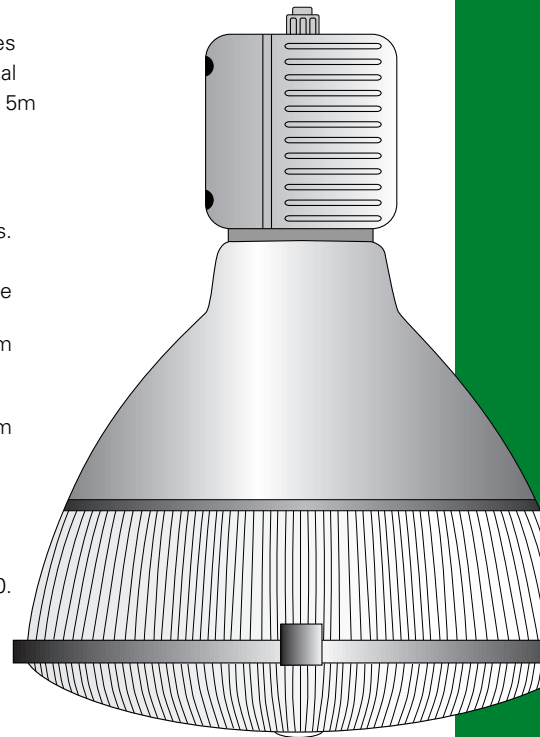

Model No.	Description	Voltage	Frequency	Lamp
FACP0043	SHOW-SEMI 150W HPS C/W Gear & Bulb	220-240V	50-60Hz	E40
FACP0044	SHOW-SEMI 250W HPS C/W Gear & Bulb	220-240V	50-60Hz	E40
FACP0045	SHOW-SEMI 400W HPS C/W Gear & Bulb	220-240V	50-60Hz	E40
FACP0046	SHOW-SEMI 250W MBF C/W Gear & Bulb	220-240V	50-60Hz	E40
FACP0047	SHOW-SEMI 400W MBF C/W Gear & Bulb	220-240V	50-60Hz	E40
FACP0048	SHOW-SEMI 250W MH C/W Gear & Bulb	220-240V	50-60Hz	E40
FACP0049	SHOW-SEMI 400W MH C/W Gear & Bulb	220-240V	50-60Hz	E40

ordering information