



capri

APPLICATION



Entrances, walkways, loading docks, tunnels, under-passes and many other wall mounted area lighting applications.

FEATURES


- Suitable for wet locations.
- Die-cast aluminium housing (back), with polyester powder paint finish. Colour: Black.
- Vandal resistant polycarbonate front housing with clear ribbed lens area.
- EPDM gasketed luminaire.
- Standard E40 or E27 base socket (depending on lamp). Mogul available on request.
- Aluminium reflector with gear tray.

CHARACTERISTICS

- Optical assembly : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V
- Wattage : 42W~125W
- Lamp type : HPS, M/H, MBF, PL-T
- Dimensions (mm) : 267(L) x 184(W) x 299(H)
- Approx. Net weight : 6~9 kg




dimension (mm)



Maximum Candela = 571, Location At Horizontal Angle = 0°, Vertical Angle = 87.5°
 Minimum Beam Candela
 Maximum Candela = 579, Location At Horizontal Angle = 90°, Vertical Angle = 87.5°
 Minimum Beam Candela
 Maximum Candela = 579, Location At Horizontal Angle = 90°, Vertical Angle = 87.5°
 Minimum Beam Candela

Capri 70W HPS

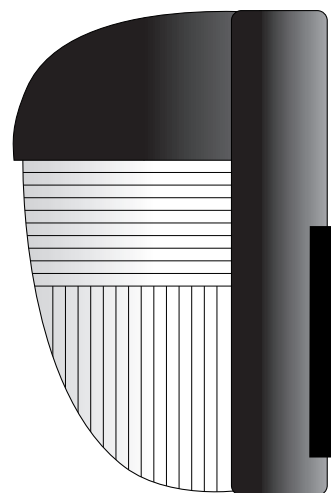

Model No.	Description	Voltage	Frequency	Lamp
GPL00275	GRUPPE CAPRI (Empty)	220-240V	50-60Hz	E27
GPCP0636	CAPRI 70W M/H C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0637	CAPRI 100W M/H C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0639	CAPRI 70W HPS C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0640	CAPRI 80W MBF C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0641	CAPRI 125W MBF C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0729	CAPRI 1x42W PLT C/W Gear & Bulb	220-240V	50-60Hz	Gx24q-4
GPCP0730	CAPRI 2x42W PLT C/W Gear & Bulb	220-240V	50-60Hz	Gx24q-4

ordering information