



ZETA

LED FLOODLIGHT


FEATURES

- Toughened glass, durable, high light transmittance
- Housing made of specialty plastic based on Acrylonitrile-styrene-acrylate copolymer (ASA). Good for both high and low temperature properties, Good dimensional stability, Non-stick coating, Anti-corrosion.
- Heatsink adopts ultrathin aluminum corrugated profile technology, light weight, good heat dissipation
- Adjustable frame
- 50% Energy Saving


CHARACTERISTICS

- Wattage : 10W-200W
- Input Voltage : AC100V~240V 50Hz/60Hz
- Light Efficiency : 90-100 Lm/W
- Power Factor : >.92
- Color Temperature : 3000K / 4000K / 6500K
- LED Chip : Epistar COB
- LED Driver : Sosen
- IP Rating : IP65
- Warranty : 2 Years
(Extended Warranty is available upon request)

Dimension (mm)

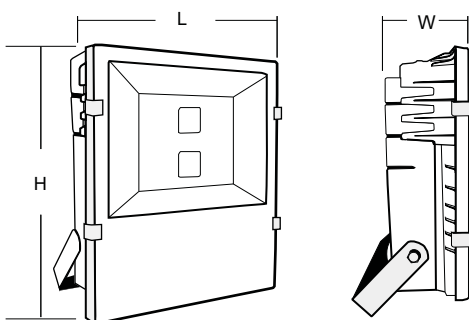

PHOTOMETRIC CURVE

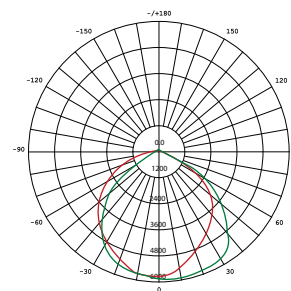

Model No.	Description	Length(mm)	Width(mm)	Height(mm)	Weight(Kg)
LECP0114	ZETA LED FLOODLIGHT 10W	133	57	179	1.06 Kg
LECP0115	ZETA LED FLOODLIGHT 20W	166	77	201	1.06 Kg
LECP0116	ZETA LED FLOODLIGHT 30W	178	81	215	1.42 Kg
LECP0117	ZETA LED FLOODLIGHT 50W	194	95	253	2.08 Kg
LECP0118	ZETA LED FLOODLIGHT 100W	250	120	300	5.07 Kg
LECP0119	ZETA LED FLOODLIGHT 150W	310	121	375	7.01 Kg
LECP0120	ZETA LED FLOODLIGHT 200W	340	121	400	7.87 Kg