



Other models available upon request. Specifications are subject to change without prior notice.

- Made in thermoresistent technopolymers
- Door cover in smoked coloured polycarbonate
- High resistance to chemicals and atmospheric agents
- Protection against electrical shock
- IP protection according to the model
- Zinc-chromed and tropicalized machine screws or moulded nylon
- Grey or white PVC glands suitable for different sizes of pipes are supplied
- DIN omega rail supplied with accessories
- Silicon-rubber gasket • Single pack make-up in shrink wrapped PVC film
- Made in Italy


Code	Demension			Modules	Pkg
	A	B	C		
92.04	120	160	90	3/5	40
92.08	200	160	90	4/8	26
92.12	225	200	110	6/12	1

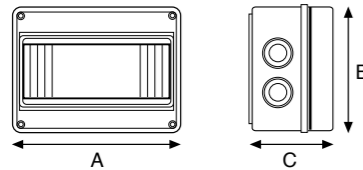

Code	Demension			Modules	Bank	Pkg
	A	B	C			
920.12	250	250	145	6/12	1	1
920.24	375	250	145	12/24	2	1
920.48	550	350	145	24/48	3	1

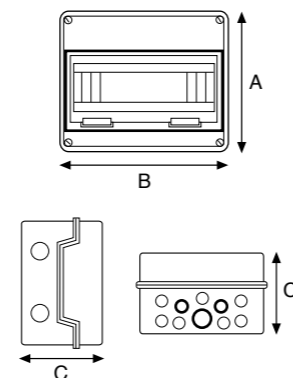

Other models available upon request. Specifications are subject to change without prior notice.

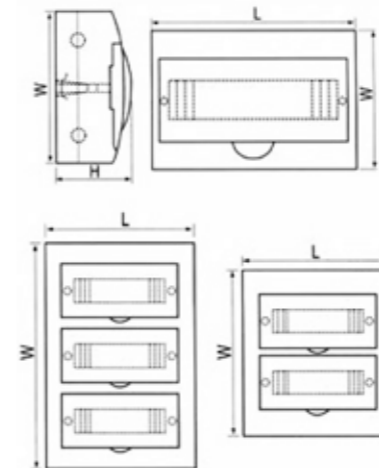

PARAMETERS:

- Rated current: 63/100 (A)
- Short-circuit making current: 10 (kA)
- Shell protection grade: IP30
- Shell material: ABS polymeric carbon
- Color: White
- Face covering: Smoke transparent

MODEL NO.	ROW INSTALLATION	DIMENSIONS			MOQ
		L (mm)	W (mm)	H (mm)	
EMD - TS 4WAYS	1 ROW	112	200	95	30
EMD - TS 6WAYS	1 ROW	148	200	95	30
EMD - TS 8WAYS	1 ROW	184	200	95	30
EMD - TS 10WAYS	1 ROW	222	200	95	20
EMD - TS 12WAYS	1 ROW	258	200	95	20
EMD - TS 15WAYS	1 ROW	310	200	95	15
EMD - TS 18WAYS	1 ROW	365	222	95	15
EMD - TS 24WAYS	2 ROW	271	325	95	10
EMD - TS 30WAYS	3 ROW	271	482	100	10