




Microwave / Motion Sensor
Available upon request



COMET

LED HIGHBAY


FEATURES

- High pressure die-cast aluminium alloy housing
- Corrosion resistant
- Finished with polyester powder paint
- Standard colour black
- Clear acrylic protector
- Integral control gear mounted on the housing for easy maintenance
- Operating temperature (Ta) - 10°C ~ 40°C
- Future proof
- Zhaga ready
- Microwave / Motion Sensor available upon request


CHARACTERISTICS

- Wattage : 60W ~ 240W
- Input Voltage : 100~277V 50/60Hz
- Light Efficacy : ≥ 130 Lm/W
- Power Factor : > 0.95
- Colour Rendering Index (CRI) : ≥ 70
- Color Temperature CCT : 3000K ~ 6000K
- Light Source : LED @ 50,000hrs
- IP Rating : IP65
- IK Rating : IK08

DIMENSION (mm)

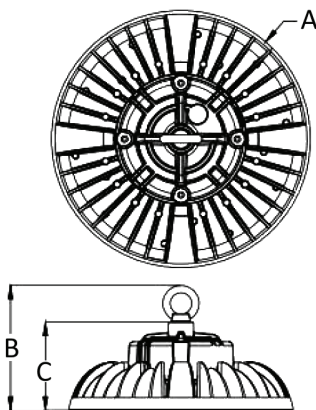

PHOTOMETRIC CURVE

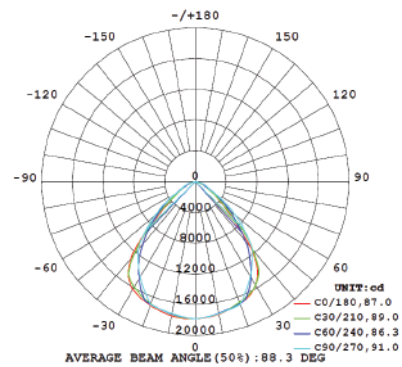

Model No.	Description	A(mm)	B(mm)	C(mm)
COM06060	COMET LED Highbay 60W	Ø220	145.8	103.3
COM10060	COMET LED Highbay 100W	Ø220	145.8	103.3
COM12060	COMET LED Highbay 120W	Ø260	145.8	103.3
COM15060	COMET LED Highbay 150W	Ø260	145.8	103.3
COM20060	COMET LED Highbay 200W	Ø300	145.8	103.3
COM24060	COMET LED Highbay 240W	Ø300	145.8	103.3