

Product Tested



Microwave / Motion Sensor
Available upon request

DELTA

LED FLOODLIGHT


FEATURES

- High pressure die-cast aluminum alloy housing
- Corrosion resistant
- Finished with polyester powder paint
- Standard colour grey
- Bracket made of galvanized steel painted in gray colour
- Anti-aging silicone rubber gasket
- Clear tempered glass cover
- Stainless steel screws
- Operating temperature - 25°C ~ 40°C
- Microwave / Motion Sensor available upon request


CHARACTERISTICS

- Wattage : 100W ~ 300W
- Input Voltage : AC100~240V 50/60Hz
- Light Efficacy : ≥ 110 Lm/W
- Power Factor : > 0.90
- Color Rendering Index (CRI) : ≥ 70
- Color Temperature CCT : 3000K ~ 6000K
- Light Source : LED @ 50,000hrs
- Power Source : Remote constant current driver
- IP Rating : IP66
- IK Rating : IK09

DIMENSION (mm)

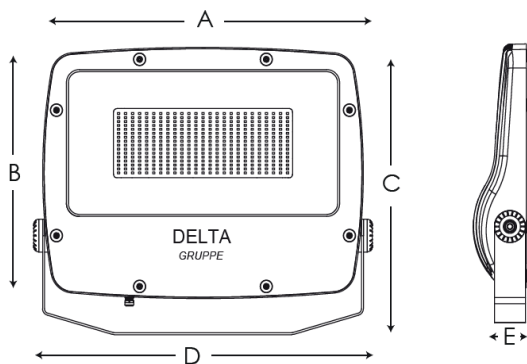

PHOTOMETRIC CURVE

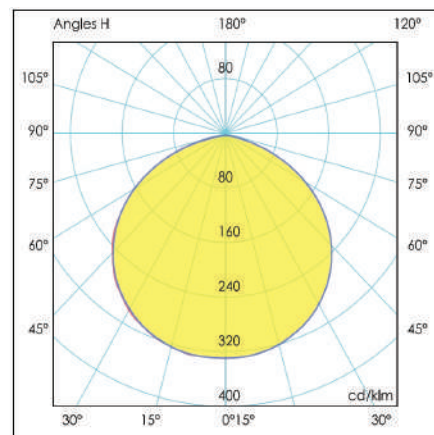

Model No.	Description	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
DEL10060	DELTA LED Floodlight 100W	252	290	342	294	65
DEL15060	DELTA LED Floodlight 150W	390	295	339	431	72
DEL20060	DELTA LED Floodlight 200W	450	342	405	493	72
DEL24060	DELTA LED Floodlight 240W	500	380	439	543	89
DEL30060	DELTA LED Floodlight 300W	500	380	439	543	89