



Microwave / Motion Sensor
Available upon request

ICON

LED Highbay


FEATURES

- High pressure die-cast aluminium alloy gear housing
- Corrosion resistant
- Finished with polyester powder paint
- Anti-aging silicon rubber gasket
- Clear tempered glass protector
- High reflectance anodized finished aluminium reflector
- Integral control gear mounted on the housing for easy maintenance
- Operating temperature (Ta) - 25°C ~ 40°C
- Microwave / Motion Sensor available upon request


CHARACTERISTICS

- Wattage : 80W ~ 240W
- Input Voltage : AC 100~277V 50/60Hz
- Light Efficacy : ≥120 Lm/W
- Power Factor : >0.90
- Colour Rendering Index (CRI) : ≥70
- Color Temperature CCT : 3000K ~ 6000K
- Light Source : LED @ 50,000hrs
- Power Source : Gruppe
- IP Rating : IP66
- IK Rating : IK08

DIMENSION (mm)

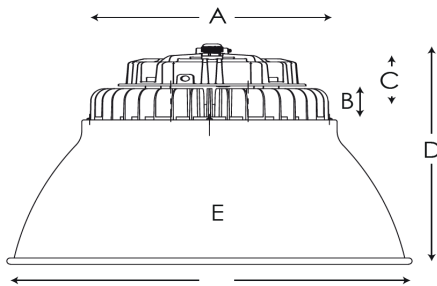

PHOTOMETRIC CURVE

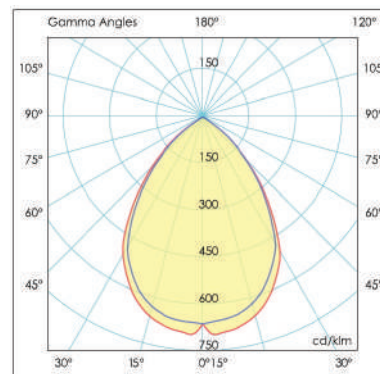

Model No.	Description	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
ICN08060	ICON LED Highbay Light 80W	260	45	121	286	470
ICN10060	ICON LED Highbay Light 100W	260	45	121	286	470
ICN12060	ICON LED Highbay Light 120W	313	45	121	311	595
ICN15060	ICON LED Highbay Light 150W	313	45	121	311	595
ICN18060	ICON LED Highbay Light 180W	378	50	126	356	600
ICN20060	ICON LED Highbay Light 200W	378	50	126	356	600
ICN24060	ICON LED Highbay Light 240W	378	50	126	356	600