



SPOT II

LED FLOODLIGHT


FEATURES

- High pressure die-cast aluminum alloy housing
- Corrosion resistant
- Finished with polyester powder paint
- Standard colour black
- Bracket made of steel painted in black colour
- Anti-aging silicon rubber gasket
- Clear tempered glass cover
- Operating temperature -20°C ~ 40°C


CHARACTERISTICS

- Wattage : 10W ~ 300W
- Input Voltage : AC220V~230V 50Hz/60Hz
- Light Efficacy : ≥100 Lm/W
- Power Factor : >0.90
- Color Temperature CCT : 3000K ~ 6000K
- Light Source : LED @ 50,000hrs
- Power Source : DOB (Driver on Board)
- IP Rating : IP65

DIMENSION (mm)

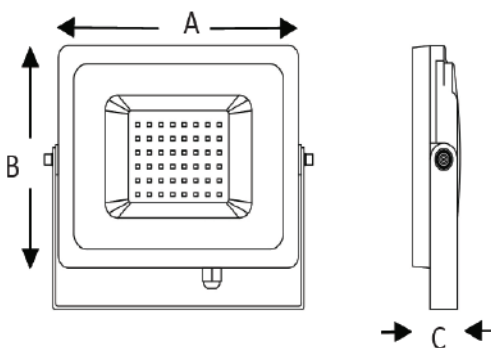

PHOTOMETRIC CURVE

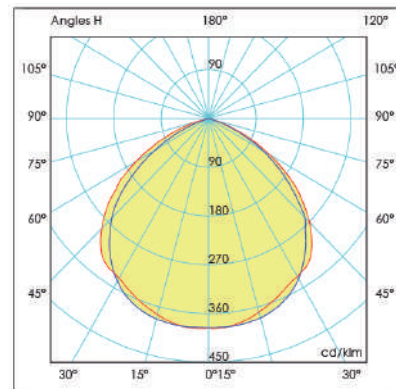

Model No.	Description	A(mm)	B(mm)	C(mm)
SP201060	SPOT II LED Floodlight 10W	103	83	23
SP202060	SPOT II LED Floodlight 20W	121	95	25
SP203060	SPOT II LED Floodlight 30W	160	123	26
SP205060	SPOT II LED Floodlight 50W	206	160	30
SP210060	SPOT II LED Floodlight 100W	270	210	32
SP215060	SPOT II LED Floodlight 150W	330	230	33
SP220060	SPOT II LED Floodlight 200W	380	280	36
SP230060	SPOT II LED Floodlight 300W	445	335	44