



Product Tested



Microwave / Motion Sensor
Available upon request

ZENITH/LED

BACKLIGHT LED CEILING PANEL


FEATURES

- Easy recess installation
- Anti glare frosted diffuser
- High quality Diffuser
- Good uniformity
- Ideal for commercial usage with minimum maintenance
- Available in multi CCT
- Microwave / Motion Sensor available upon request

Optional Accessories:

- Surface mounting bracket
- Pendant mounting kits
- Dimmable driver


DIMENSION (mm)

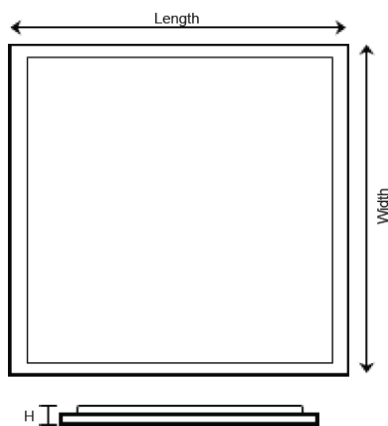

CHARACTERISTICS

- Wattage : 20W / 36W / 60W
- Input Voltage : 220-240VAC 50/60Hz
- Light Efficacy : ≥ 120 Lm/W
- Power Factor : 0.9
- Color Rendering Index(CRI) : > 80
- UGR : ≤ 22
- Color Temperature CCT : 3000K/4000K/5000K
- Light Source : LED @ 50,000hrs
- Power Source : Remote Constant Current Driver
- IP Rating : IP20

PHOTOMETRIC CURVE

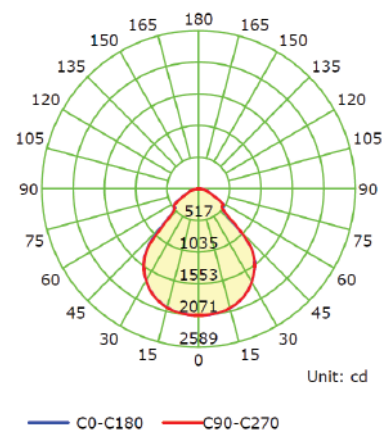

Model No.	Description	Length(mm)	Width(mm)	Height(mm)
Z122040/22	ZENITH LED Ceiling Panel 20W 4000K	595	295	30
Z223640/22	ZENITH LED Ceiling Panel 36W 4000K	595	595	30
Z143640/22	ZENITH LED Ceiling Panel 36W 4000K	1195	295	30
Z244040/22	ZENITH LED Ceiling Panel 40W 4000K	1195	595	30
Z246040/22	ZENITH LED Ceiling Panel 60W 4000K	1195	595	30