


iLED TUBE

T5 LED TUBE

FEATURES

- Integrated driver design, using traditional G5 holder for easy installation
- Special surface optical design with low glare and well-distributed lighting
- Glass tube with EMP Starter
- No mercury, UV and IR radiation

DIMENSION (mm)

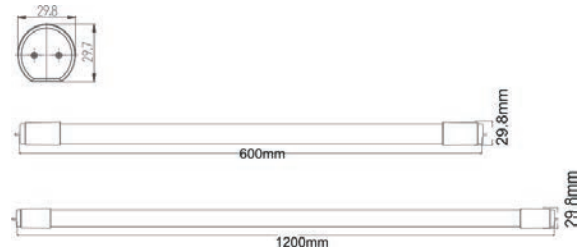

MODEL NO.	iLED0049	iLED0050
Technical Data	iLED T5-60	iLED T5-120
Lamp Base	G5	G5
Power	10W	18W
Luminous Flux	1000lm	1800lm
Efficacy	100lm/W	100lm/W
Beam Angle	300°	300°
Input Voltage and Frequency	200-260V / 50-60Hz	220-260V / 50-60Hz
Ambient Temperature	-15°C ~ 45°C	-15°C ~ 45°C
Color Rendering Index	Ra≥80	Ra≥80
Restrike	<0.5s = 100% Light output	<0.5s = 100% Light output
Dimming	No	No
LED Chips - SMD	50,000hrs L70/B50	50,000hrs L70/B50
Switching Cycle	>15000	>15000
Dimension	Ø16mm x 600mm	Ø16mm x 1200mm