


iLED ECO HIGH LUMEN

T8 LED TUBE

FEATURES

- Integrated driver design, using traditional G13 holder for easy installation
- Special surface optical design with low glare and well-distributed lighting
- No mercury, UV and IR radiation
- Battery pack compatible
- Certification: CE, IEC62471, IEC62776

DIMENSION (mm)

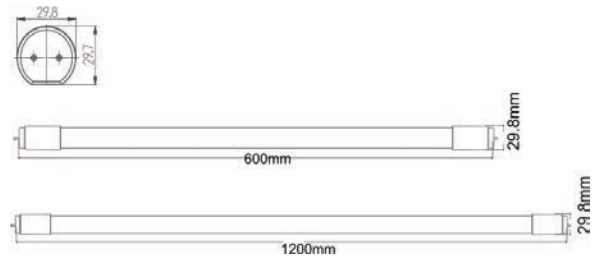

MODEL NO.	iLED0051	iLED0052
Technical Data	iLED T8-60	iLED T8-120
Lamp Base	G13	G13
Power	7.5W	15W
Luminous Flux	1050lm	2100lm
Efficacy	140lm/W	140lm/W
Beam Angle	190°	190°
Input Voltage and Frequency	200-260V / 50-60Hz	200-260V / 50-60Hz
Ambient Temperature	-15°C ~ 45°C	-15°C ~ 45°C
Color Rendering Index	Ra≥80	Ra≥80
Restrike	<0.5s = 100% Light output	<0.5s = 100% Light output
Dimming	No	No
LED Chips - SMD	50,000hrs L70/B50	50,000hrs L70/B50
Switching Cycle	>15000	>15000
Dimension	Ø29.8mm x 600mm	Ø29.8mm x 1200mm
Single Box	35mm x 35mm x 615mm	35mm x 35mm x 615mm
Carton	190 x 190 x 630mm (20 pcs)	190 x 190 x 1245mm (20 pcs)