




ARRO VE

STREETLIGHT

FEATURES

- Enclosed luminaires for pole and mounting.
 - Die-cast aluminum housing : top and bottom.
 - Finished with polyester powder paint. Standard colour - Grey
 - Ballast components mounted on a removable gear tray.
 - Anodised finished on hydroformed aluminum faceted reflector.
 - Tempered clearcurved glass. Filter Optical.
 - Silicon sealed optics - Tightseal 66.
 - Adjustable lamp socket : Standard E27 or E40 (depending on lamp)
 - Easy access to ballast compartment and lamp by opening the top housing.
 - Lamp replacement without tools.
 - Aerodynamic resistance (CXS) : 0.053m²
 - Installation - Suitable for mounting on mast arms 6-12 meters
- Dimming system & Deep bowl (reflector) available upon request.


DIMENSION (mm)

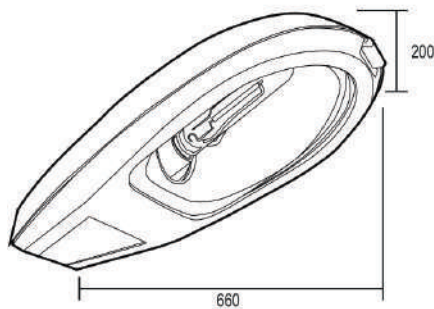

CHARACTERISTICS

- Wattage : 70W ~ 400W
- Input Voltage : AC 220~240V 50/60Hz
- Lamp Type : HPS / MH / MBF
- Electrical Insulation : Class 1
- Color Temperature : 3000K~6500K
- IP Rating : IP65

PHOTOMETRIC CURVE

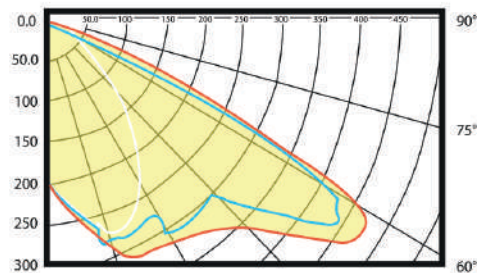

ARRO 1 250W HPSV

Model No.	Description	Voltage	Frequency	Lamp
ACP10001	ARRO VE 70W HPS C/W Control Gear and Lamp	220-240V	50-60Hz	E27
ACP10003	ARRO VE 150W HPS C/W Control Gear and Lamp	220-240V	50-60Hz	E40
ACP10004	ARRO VE 250W HPS C/W Control Gear and Lamp	220-240V	50-60Hz	E40
ACP10005	ARRO VE 70W M/H C/W Control Gear and Lamp	220-240V	50-60Hz	E40
ACP10006	ARRO VE 150W M/H C/W Control Gear and Lamp	220-240V	50-60Hz	E40
ACP10007	ARRO VE 250W M/H C/W Control Gear and Lamp	220-240V	50-60Hz	E40