



HUB SMART

LED BATTEN


FEATURES

- Housing in aluminum extrusion material (anodized)
- High impact resistant polycarbonate (PC) diffuser
- Top down snap-locking mechanism
- Stainless steel vandal proof screws
- Good Uniformity and high lumen output
- Built-in Smart Sensor / Dimming 0-10V with wireless remote control technology (SLP)


CHARACTERISTICS

- Wattage : 6.5W~23.6W
- Input Voltage : 220V-240V 50/60Hz
- Light Efficacy : ≥ 120 Lm/W
- Power Factor : > 0.90
- Color Temperature CCT : 3000K~6000K
- Light Source : LED @ 50,000hrs
- Power Source : Dimming Driver 0-10V + Aux: DC12V
- Operating Temperature : $-20^{\circ}\text{C} \sim +35^{\circ}\text{C}$
- IP Rating : IP65
- IK Rating : IK08

DIMENSION (mm)

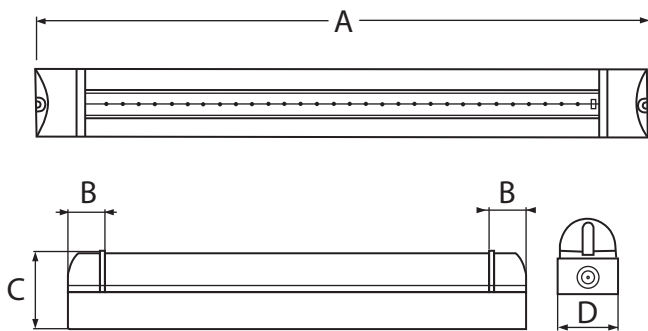

PHOTOMETRIC CURVE

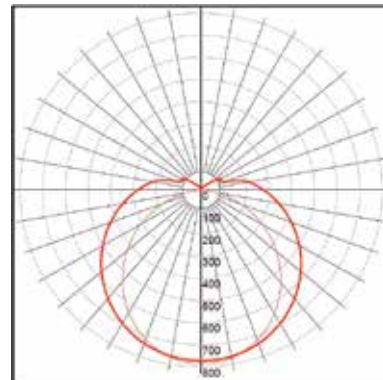

Model No.	Description	A(mm)	B(mm)	C(mm)	D(mm)
HUB20730	HUB 6.5W 2FT Smart LED Batten	700	57	78.5	72
HUB21130	HUB 10.9W 2FT Smart LED Batten	700	57	78.5	72
HUB21230	HUB 11.8W 2FT Smart LED Batten	700	57	78.5	72
HUB41230	HUB 11.8W 4FT Smart LED Batten	1220	114	78	72
HUB41830	HUB 18W 4FT Smart LED Batten	1220	114	78	72
HUB42430	HUB 23.6W 4FT Smart LED Batten	1220	114	78	72

** The above ordering code is base on CCT~3000K