



# DELTA G2 SMART

## LED FLOODLIGHT


### FEATURES

- High pressure die-cast aluminum alloy housing
- Finished with polyester powder paint & corrosion resistant
- Back opening for easy maintenance
- Aluminium clips
- Clear tempered glass cover
- Standard colour grey
- With Zhaga Smart Sensor / Dimming 0-10V with wireless remote control technology (SLP)


### CHARACTERISTICS

- Wattage : 30W~50W
- Input Voltage : AC100-240V 50/60Hz
- Light Efficacy :  $\geq 120 \sim 130$  Lm/W
- Power Factor :  $> 0.90$
- Color Rendering Index (CRI) :  $\geq 70$
- Color Temperature CCT : 3000K~6000K
- Light Source : LED @ 50,000hrs
- Power Source : Dimming LED Driver 0-10V
- Operating temperature :  $- 25^{\circ}\text{C} \sim +40^{\circ}\text{C}$
- IP Rating : IP66
- IK Rating : IK08

### DIMENSION (mm)

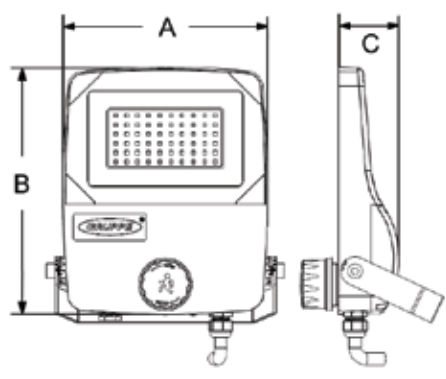

### PHOTOMETRIC CURVE

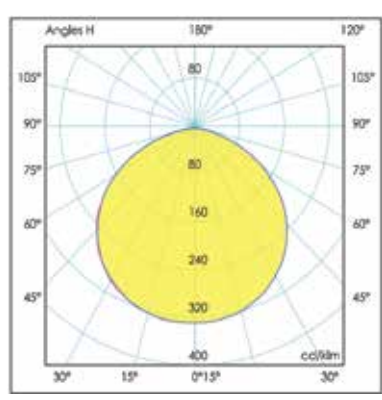

Model No.	Description	A(mm)	B(mm)	C(mm)
DLG03030/S	DELTA G2 Smart LED Floodlight 30W	185	225	55
DLG05030/S	DELTA G2 Smart LED Floodlight 50W	185	225	55

\*\* The above ordering code is base on CCT~3000K