



URBAN / L SMART READY

LED POST TOP

FEATURES

- Die-casting aluminium body
- Anti-ultraviolet polyester powder painting & corrosion resistant
- Clear tempered glass cover with polycarbonate (PC) reflector
- All external screws are made of 304 stainless steel
- Dimming Driver 0-10V + Aux.12V DC / Dali Driver


Optional:

- Zhaga Smart Sensor / wireless remote lighting control technology (SLP)


CHARACTERISTICS

- Wattage : 15W~75W
- Input Voltage : 100-240V 50/60Hz
- Light Efficacy : 120~130 Lm/W
- Color Temperature CCT : 3000K~6000K
- Light Source : LED @ 50,000Hrs
- Power Source : Dimming LED Driver 0-10V
- Operating Temperature : -25°C ~ +40°C
- IP Rating : IP66
- IK Rating : IK08

DIMENSION (mm)

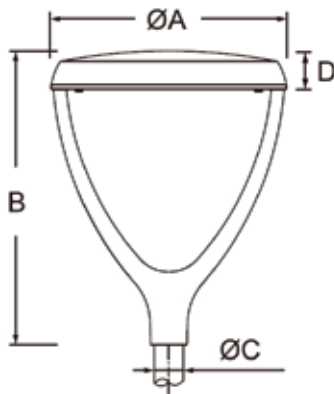

PHOTOMETRIC CURVE

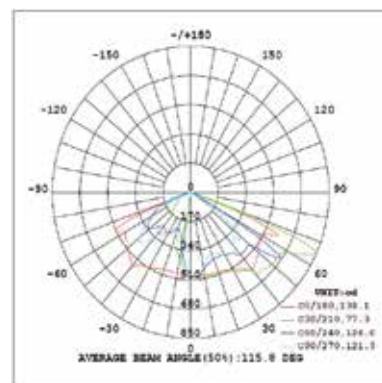

Model	Description	Lumen(lm)	ØA(mm)	B(mm)	ØC(mm)	D(mm)	Weight(Kg)
UBL01530/S	URBAN/L Smart Ready LED Post Top 15W	1950	490	610	60x90	84	12.5
UBL02030/S	URBAN/L Smart Ready LED Post Top 20W	2600	490	610	60x90	84	12.5
UBL03030/S	URBAN/L Smart Ready LED Post Top 30W	3900	490	610	60x90	84	12.5
UBL04030/S	URBAN/L Smart Ready LED Post Top 40W	5200	490	610	60x90	84	12.5
UBL06030/S	URBAN/L Smart Ready LED Post Top 60W	7800	490	610	60x90	84	12.5
UBL07530/S	URBAN/L Smart Ready LED Post Top 75W	9750	490	610	60x90	84	12.5

** The above ordering code is base on CCT~3000K