



# URBAN / P - SOLAR

## LED POST TOP

### FEATURES

- Die-casting aluminium body
- Anti-ultraviolet polyester powder painting & corrosion resistant
- Clear tempered glass cover with white polycarbonate (PC) reflector
- All external screws are made of 304 stainless steel
- Efficient monocrystalline silicon solar panels
- Lithium Iron Phosphate Battery (LiFeP04)
- Motion Sensor / Time Setting Controller


### Optional:

- With Smart Lighting Remote Control Technology (Upon Request)


### CHARACTERISTICS

- Wattage : 12W
- Light Efficacy : 130~150 Lm/W
- Color Temperature CCT : 3000K~6000K
- Light Source : LED @ 50,000Hrs
- Operating Temperature : -25°C ~ +40°C
- IP Rating : IP66
- IK Rating : IK08

### DIMENSION (mm)

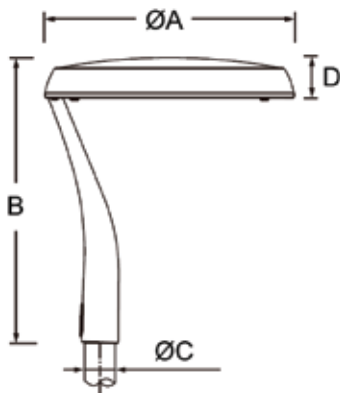

### PHOTOMETRIC CURVE

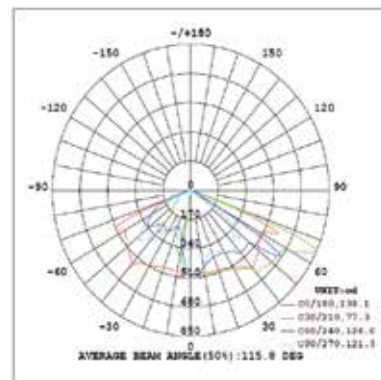

Model	Description	Lumen(lm)	ØA(mm)	B(mm)	ØC(mm)	D(mm)	Weight(kg)
UBP1230/SS	URBAN/P Solar LED Post Top 12W	1600	490	565	60x90	84	10.5

\*\* The above ordering code is base on CCT~3000K