



Microwave / Motion Sensor  
Available upon request

# AQUA LED-7

## LED WEATHERPROOF BATTEN


### FEATURES

- Durable and lightweight
- Injection mould polycarbonate body and diffuser
- Easy locking stainless steel clips
- Pleasant appearance and reduce direct glare
- Excellent light distribution
- Operating temperature (Ta) -25°C ~ 40°C
- With 0-10V Dimming Driver
- Microwave / Motion Sensor available upon request


### CHARACTERISTICS

- Wattage : 9W ~ 70W
- Input Voltage : 220~240V 50/60Hz
- Light Efficacy :  $\geq 120$  Lm/W
- Power Factor :  $> 0.80$
- Color Temperature CCT : 4000K ~ 6000K
- Light Source : LED @ 50,000hrs
- PowerSource : Integrated
- IP Rating : IP66
- IK Rating : IK08

### DIMENSION (mm)

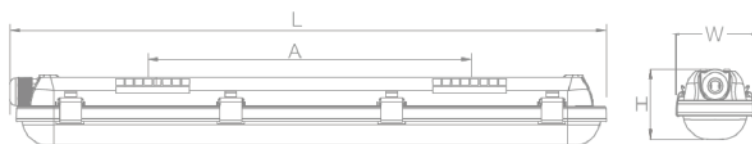

### PHOTOMETRIC CURVE

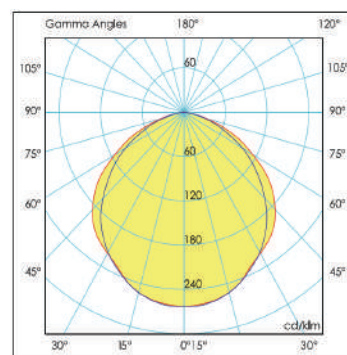

| Model      | Description    | Lumen  | Length(mm) | Width(mm) | Height(mm) | Install Size(A) |
|------------|----------------|--------|------------|-----------|------------|-----------------|
| AQUA7D0960 | AQUA LED-7 9W  | 1080lm | 600        | 79        | 68         | 340mm           |
| AQUA7D1860 | AQUA LED-7 18W | 2160lm | 600        | 79        | 68         | 340mm           |
| AQUA7D2060 | AQUA LED-7 20W | 2400lm | 1200       | 79        | 68         | 820mm           |
| AQUA7D3660 | AQUA LED-7 36W | 4320lm | 1200       | 79        | 68         | 820mm           |
| AQUA7D2560 | AQUA LED-7 25W | 3000lm | 1500       | 79        | 68         | 1120mm          |
| AQUA7D5060 | AQUA LED-7 50W | 6000lm | 1500       | 79        | 68         | 1120mm          |
| AQUA7D3460 | AQUA LED-7 34W | 4080lm | 1800       | 79        | 68         | 1420mm          |
| AQUA7D7060 | AQUA LED-7 70W | 8400lm | 1800       | 79        | 68         | 1420mm          |