



AQUA LED-7 SMART

LED WEATHERPROOF BATTEN

FEATURES


- Durable and lightweight
- Injection mould polycarbonate body and diffuser
- Easy looking stainless steel clips
- Pleasant appearance and reduce direct glare
- Excellent light distribution
- Operating temperature (Ta) -25°C ~ 40°C
- With 0-10V Dimming Driver

CHARACTERISTICS


- Wattage : 9W ~ 70W
- Input Voltage : 220~240V 50/60Hz
- Light Efficacy : ≥120 Lm/W
- Power Factor : >0.80
- Color Temperature CCT : 4000K ~ 6000K
- Light Source : LED @ 50,000hrs
- Power Source : Integrated
- IP Rating : IP66
- IK Rating : IK08



DIMENSION (mm)

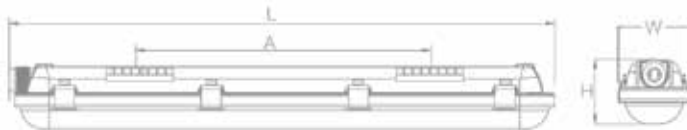

PHOTOMETRIC CURVE

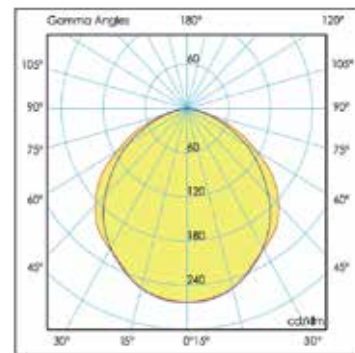

Model	Description	Lumen	Lenght(mm)	Width(mm)	Height(mm)	Install Size(A)
AQUA7D0960	AQUA LED-7 9W	1080lm	600	79	68	340mm
AQUA7D1860	AQUA LED-7 18W	2160lm	600	79	68	340mm
AQUA7D2060	AQUA LED-7 20W	2400lm	1200	79	68	820mm
AQUA7D3660	AQUA LED-7 36W	4320lm	1200	79	68	820mm
AQUA7D2560	AQUA LED-7 25W	3000lm	1500	79	68	1120mm
AQUA7D5060	AQUA LED-7 50W	6000lm	1500	79	68	1120mm
AQUA7D3460	AQUA LED-7 34W	4080lm	1800	79	68	1420mm
AQUA7D7060	AQUA LED-7 70W	8400lm	1800	79	68	1420mm